

ZnSレンズモジュール 9.1mm f1.0mm (#636DLC)

- Possible to eliminate window by high strength and DLC coat
- Cost effective compact lens for high volume application
- Designed for uncooled IR sensors
- Optimized for the 8-12μm wavelength range




P/N		9.1mm f/1.0mm	(#636DLC)
Property		Value	Remarks
Lens material		Zinc Sulfide	
Optical	Focal Length	9.1mm	
	F/#	1.0	
	Horizontal Filed of View	24°	12μm 320 × 240
	Image Circle	Φ4.8mm	
	Flange Back(BFL)	4.8mm	Including windows
	Focus Range	0.3m to infinity	
	Focus Adjustment	Manual	
	Lens transmission (average)	0.70	wavelength8-12μm
	1 st Surface Coating	DLC Coating* ¹	wavelength8-12μm
Mechanical	Weight	6g	
	Lens Mount	Fixed adjustable	M16 × P0.5[mm]
Environmental	Operating Temperature	-40°C to +80°C	Athermalized
	Sealing	IP67	


*1 Environmental Test

Adhesion	Tape Test	MIL-F-48616
Humidity	85°C/95% X240h	MIL-F-48616
Abrasion	Severe 20 stroke	MIL-F-48616
weatherability	UV+water X1000h	JIS D 0205 WAN1S
Sand and Dust test	13.3m/s, <150μm, ≥3h, 0.33g/m ³	MIL-STD-810G 510.5


MTF Curves

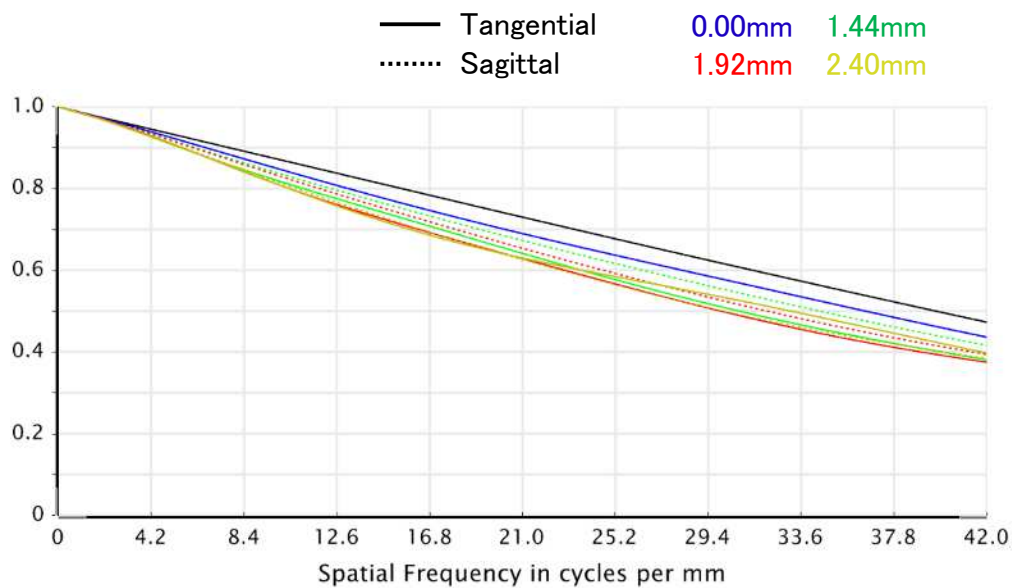

Layout

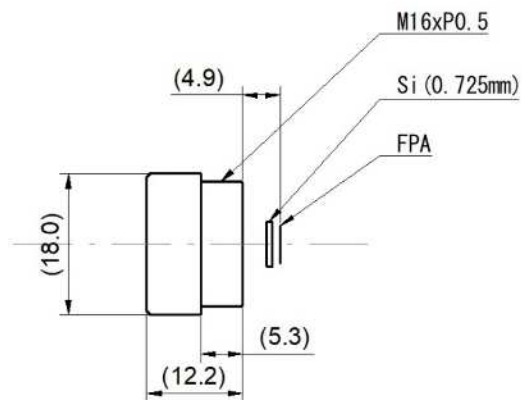

Distortion

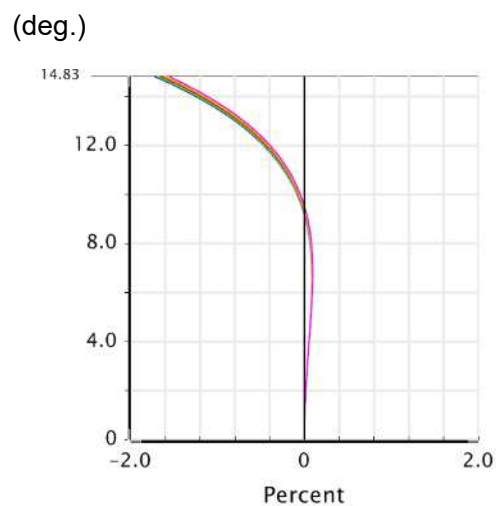

Contacts :
 Industrial Optics Div.
 China Tel: +86(0)-13006699017
 Overseas Tel: +86(0)-18002540712

(2021.04.16)