


① IRIS CABLE

(+)	RED	INPUT VOLTAGE
(-)	BLACK	GROUND
	WHITE	VIDEO SIGNAL
	GREEN	REMOTE CONTROL

② MOTOR CABLE

(+)	GREEN	FOCUS NEAR
(+)	BLACK	FOCUS FAR
(+)	YELLOW	ZOOM IN
(+)	RED	ZOOM OUT

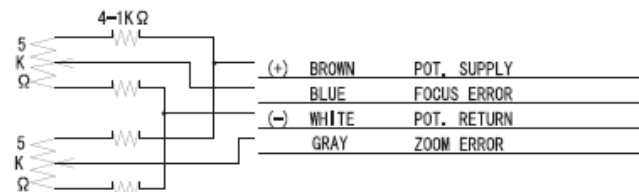


SPECIFICATION

1. USE	FOR 1/3" COLOR B/W CAMERA		
2. FOCAL LENGTH	f=5.5 ~ 165 mm		
3. IRIS RANGE	F=1.8 ~ 500 ~ Close		
4. IMAGE SIZE	φ 6 (4.8x3.6)		
5. BACK FOCAL LENGTH	15.5 mm in air		
6. FLANGE FOCAL LENGTH	12.5 mm in air		
7. FOCUS RANGE	∞ ~ 1.8 m		
8. FIELD ANGLE	DIA.	(W)	(T)
	HOR.	58.7 °	2.10 °
	VER.	47.6 °	1.70 °
	VER.	33.9 °	1.30 °
9. FIELD OF VIEW AT W.L.D.	DIA.	1.879 mm	62.8 mm
	HOR.	1.492 mm	50.6 mm
	VER.	1.107 mm	38.1 mm
10. DISTORTION		-2.5 %	0.7 %
11. LENS CONSTRUCTION	12 GROUPS 14 ELEMENTS		
12. CLEAR APERTURE	FRONT	φ6.0	REAR φ10.5
13. EXIT PUPIL POSITION		-70.0 mm	(format)
14. WEIGHT	850 g (880 g)		

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190Ω (20° C)
	COLOR	RED(+) BLACK
BRAKE COIL	RESISTOR	1150Ω (20° C)
	COLOR	YELLOW(+) GREEN
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V
		W/CLOSING SPRING



AUTO IRIS
1/3" F1.8/5.5 ~ 165mm

LMZ300AM AMP
LMZ300AMDC AMPDC